




ZXX 型中心传动单（双）管吸泥机

http://www.jdpyhj.com

TYPE-ZXX CENTER TRANSMISSION SINGLE(DOUBLE) PIPE DIRT SUCKING MACHINE

外形尺寸与性能参数 Shape and Size Parameters

型号	参数	池径Φ (m)	周边线速 (m/min)	电机功率 (kW)	池深H (m)
ZXX-25		Φ25	3~4.5	0.55	3.5~4.5
ZXX-36		Φ36			
ZXX-40		Φ40			
ZXX-42		Φ42	3~4.5	0.75	3.5~4.5
ZXX-50		Φ50			

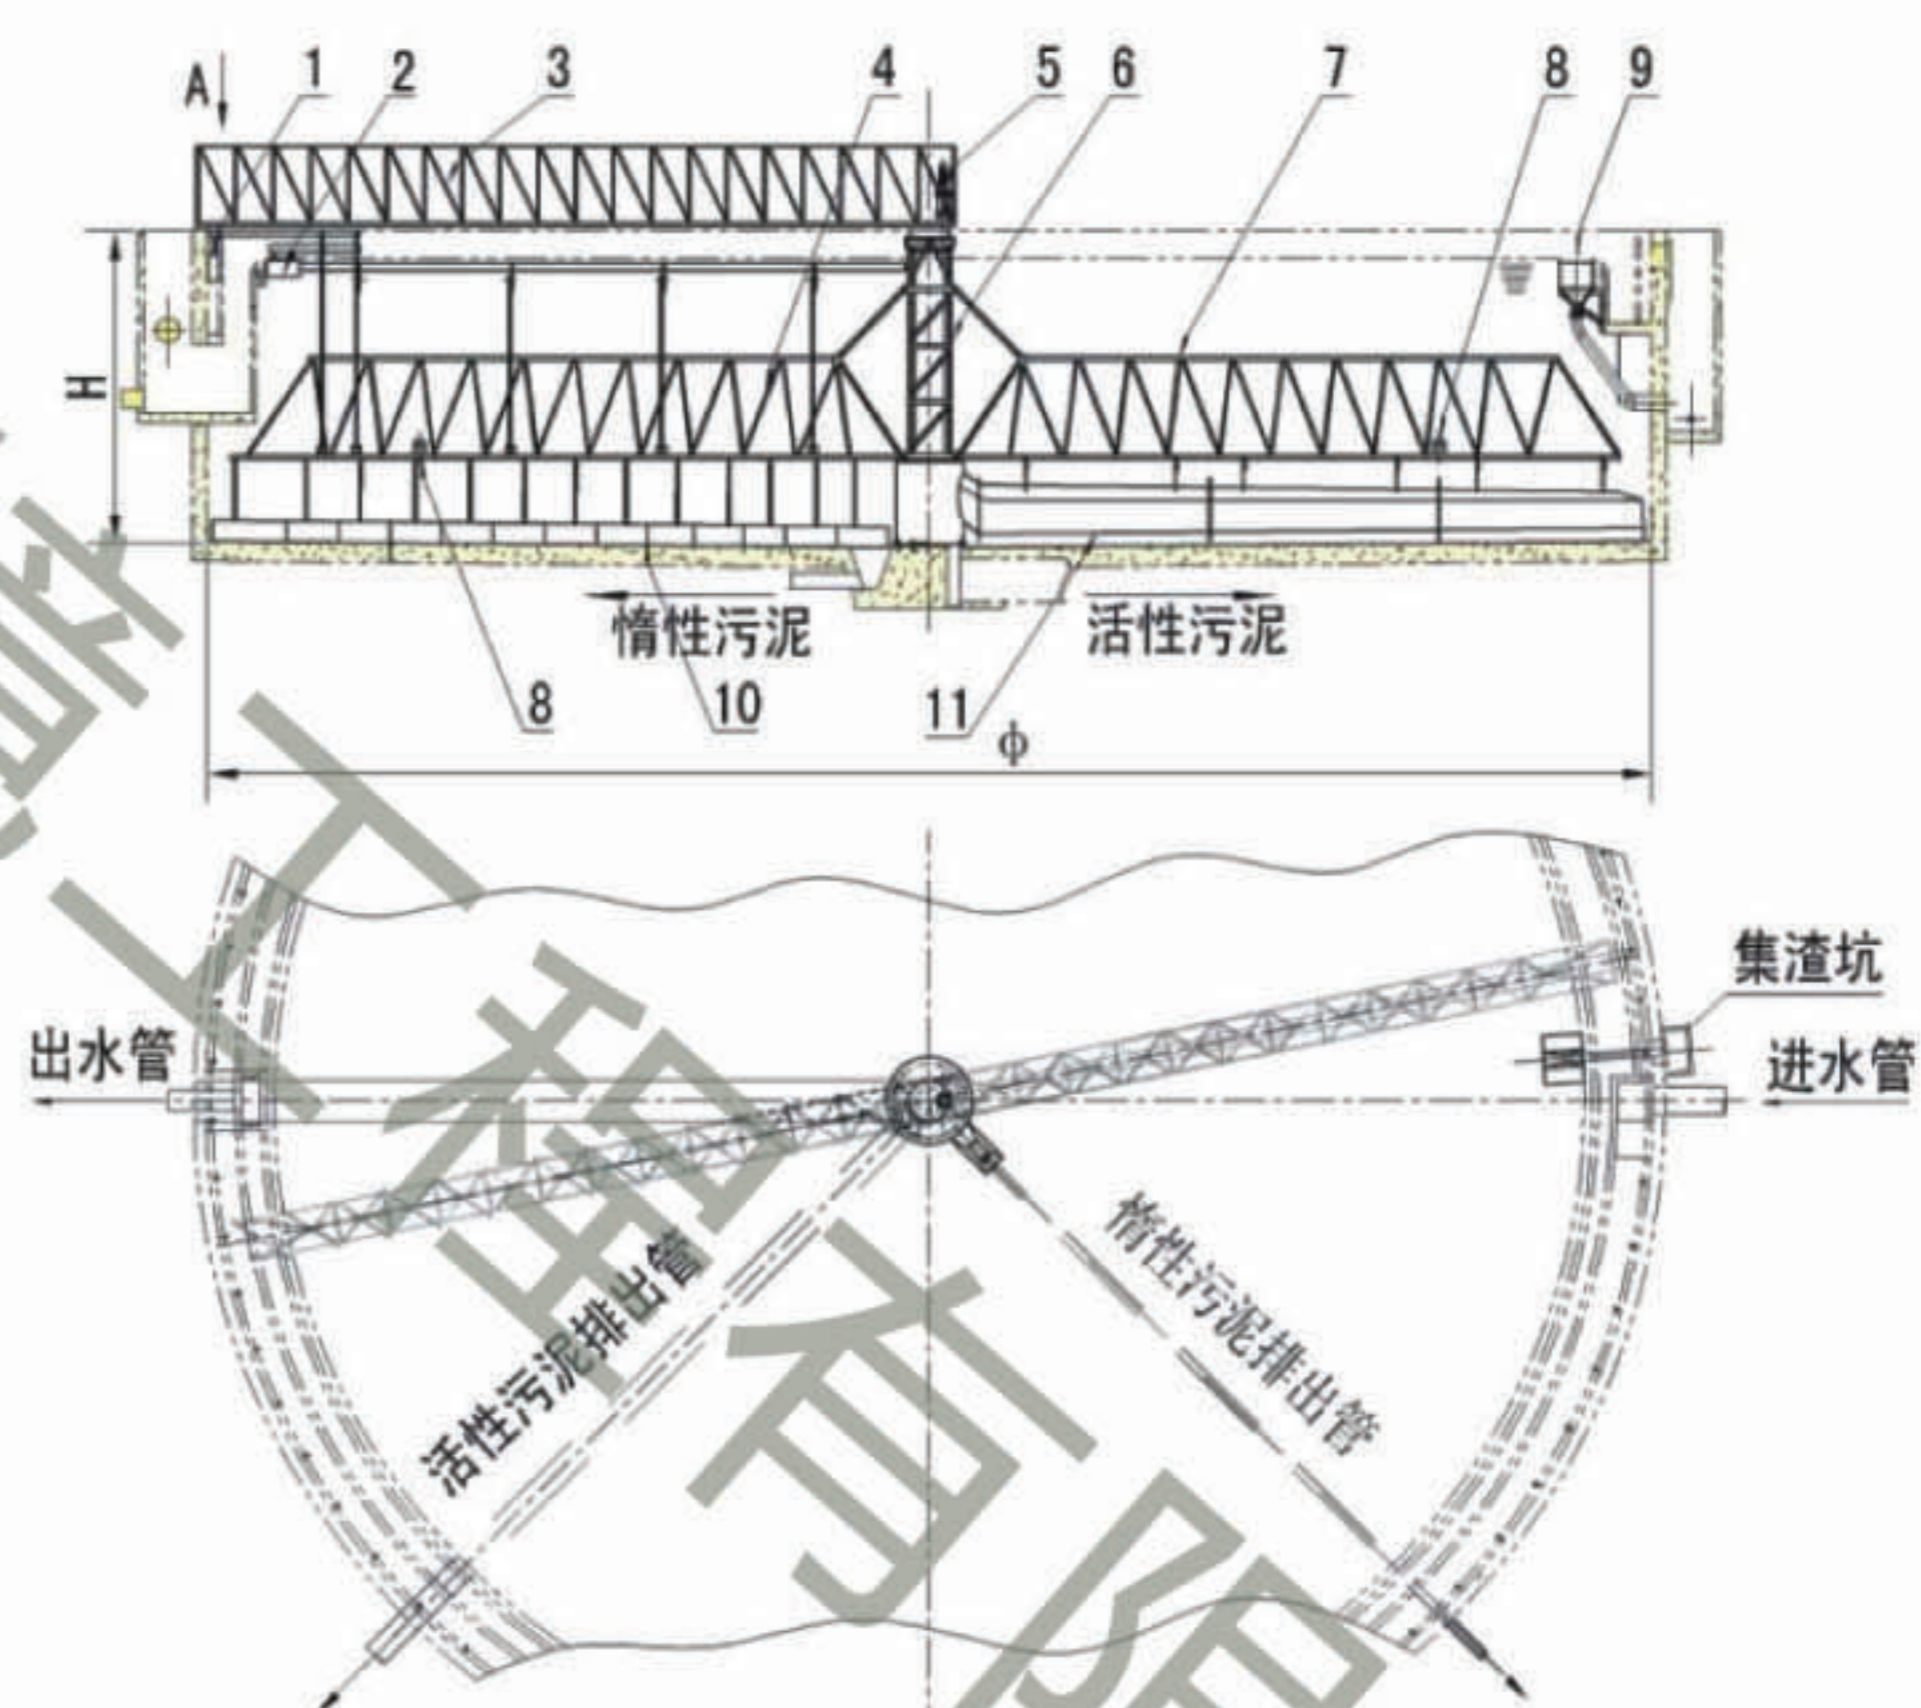

1、进水槽撇渣板 2、撇渣机构 3、工作桥 4、刮泥架 5、传动机构
6、中心竖架 7、吸泥架 8、配重块 9、排渣斗 10、刮泥板 11、吸泥管

订货说明 Requirements for Order

1. 订货时请提供二沉池的设计流量(最大、最小、平均值), 池径、池深、回流比等工艺设计基本参数及吸泥机的数量。
2. 需要溢流堰板, 挡水板、排渣斗、套筒阀等配件时, 请予注明。若远程控制时, 套筒阀需用电驱动, 请予注明, 渣斗及堰板安装参见周边传动吸泥机 (P89)。
3. 注明主体设备的材质(碳钢或不锈钢等), 防腐有特殊要求时请注明。
4. 用户有特殊要求时, 经双方协商后作出调整。
5. 我公司可根据用户要求为用户设计50m以内的任何规格的吸泥机。
6. 我公司可为用户提供安装、调试等完善的售后服务。

1. When placing an order, note the basic parameters such as the design capacity of flow (the maximum capacity, the minimum one, the average one), the diameter of the tank, the depth, reflux ratio, and etc, and note how many suckers are needed.
2. In the case of remote-control, please specify if muff valve should be electrically driven. The installation of overflow weir and hopper for discharge of dregs refers to the peripheral transmission dirt scrapping and sucking machine, note that; for the installations of the hopper and overflow weir, refer to SLUDGE SUCKING MACHINE BY PERIPHERAL TRANSMISSION (P89) .
3. Note material of the principal parts of the sucker (carbon steel, or stainless steel, or something else), also note the special corrosion-resisting requirements if necessary.
4. When customers place orders with special requirements, the size and parameters of the sucker may be revised according to the agreement reached between them and the seller.
5. Based on the requests of customers, the company can design every sediment sucker which has a diameter of less than 50m.
6. The company provides customers with perfect after-sale services such as installation, debugging and so on.