




# FJ型絮凝池反应搅拌机 TYPE-FJ COAGULATION AGITATOR

<http://www.jdpyhj.com>


## LFJ 型外形结构 Outlines

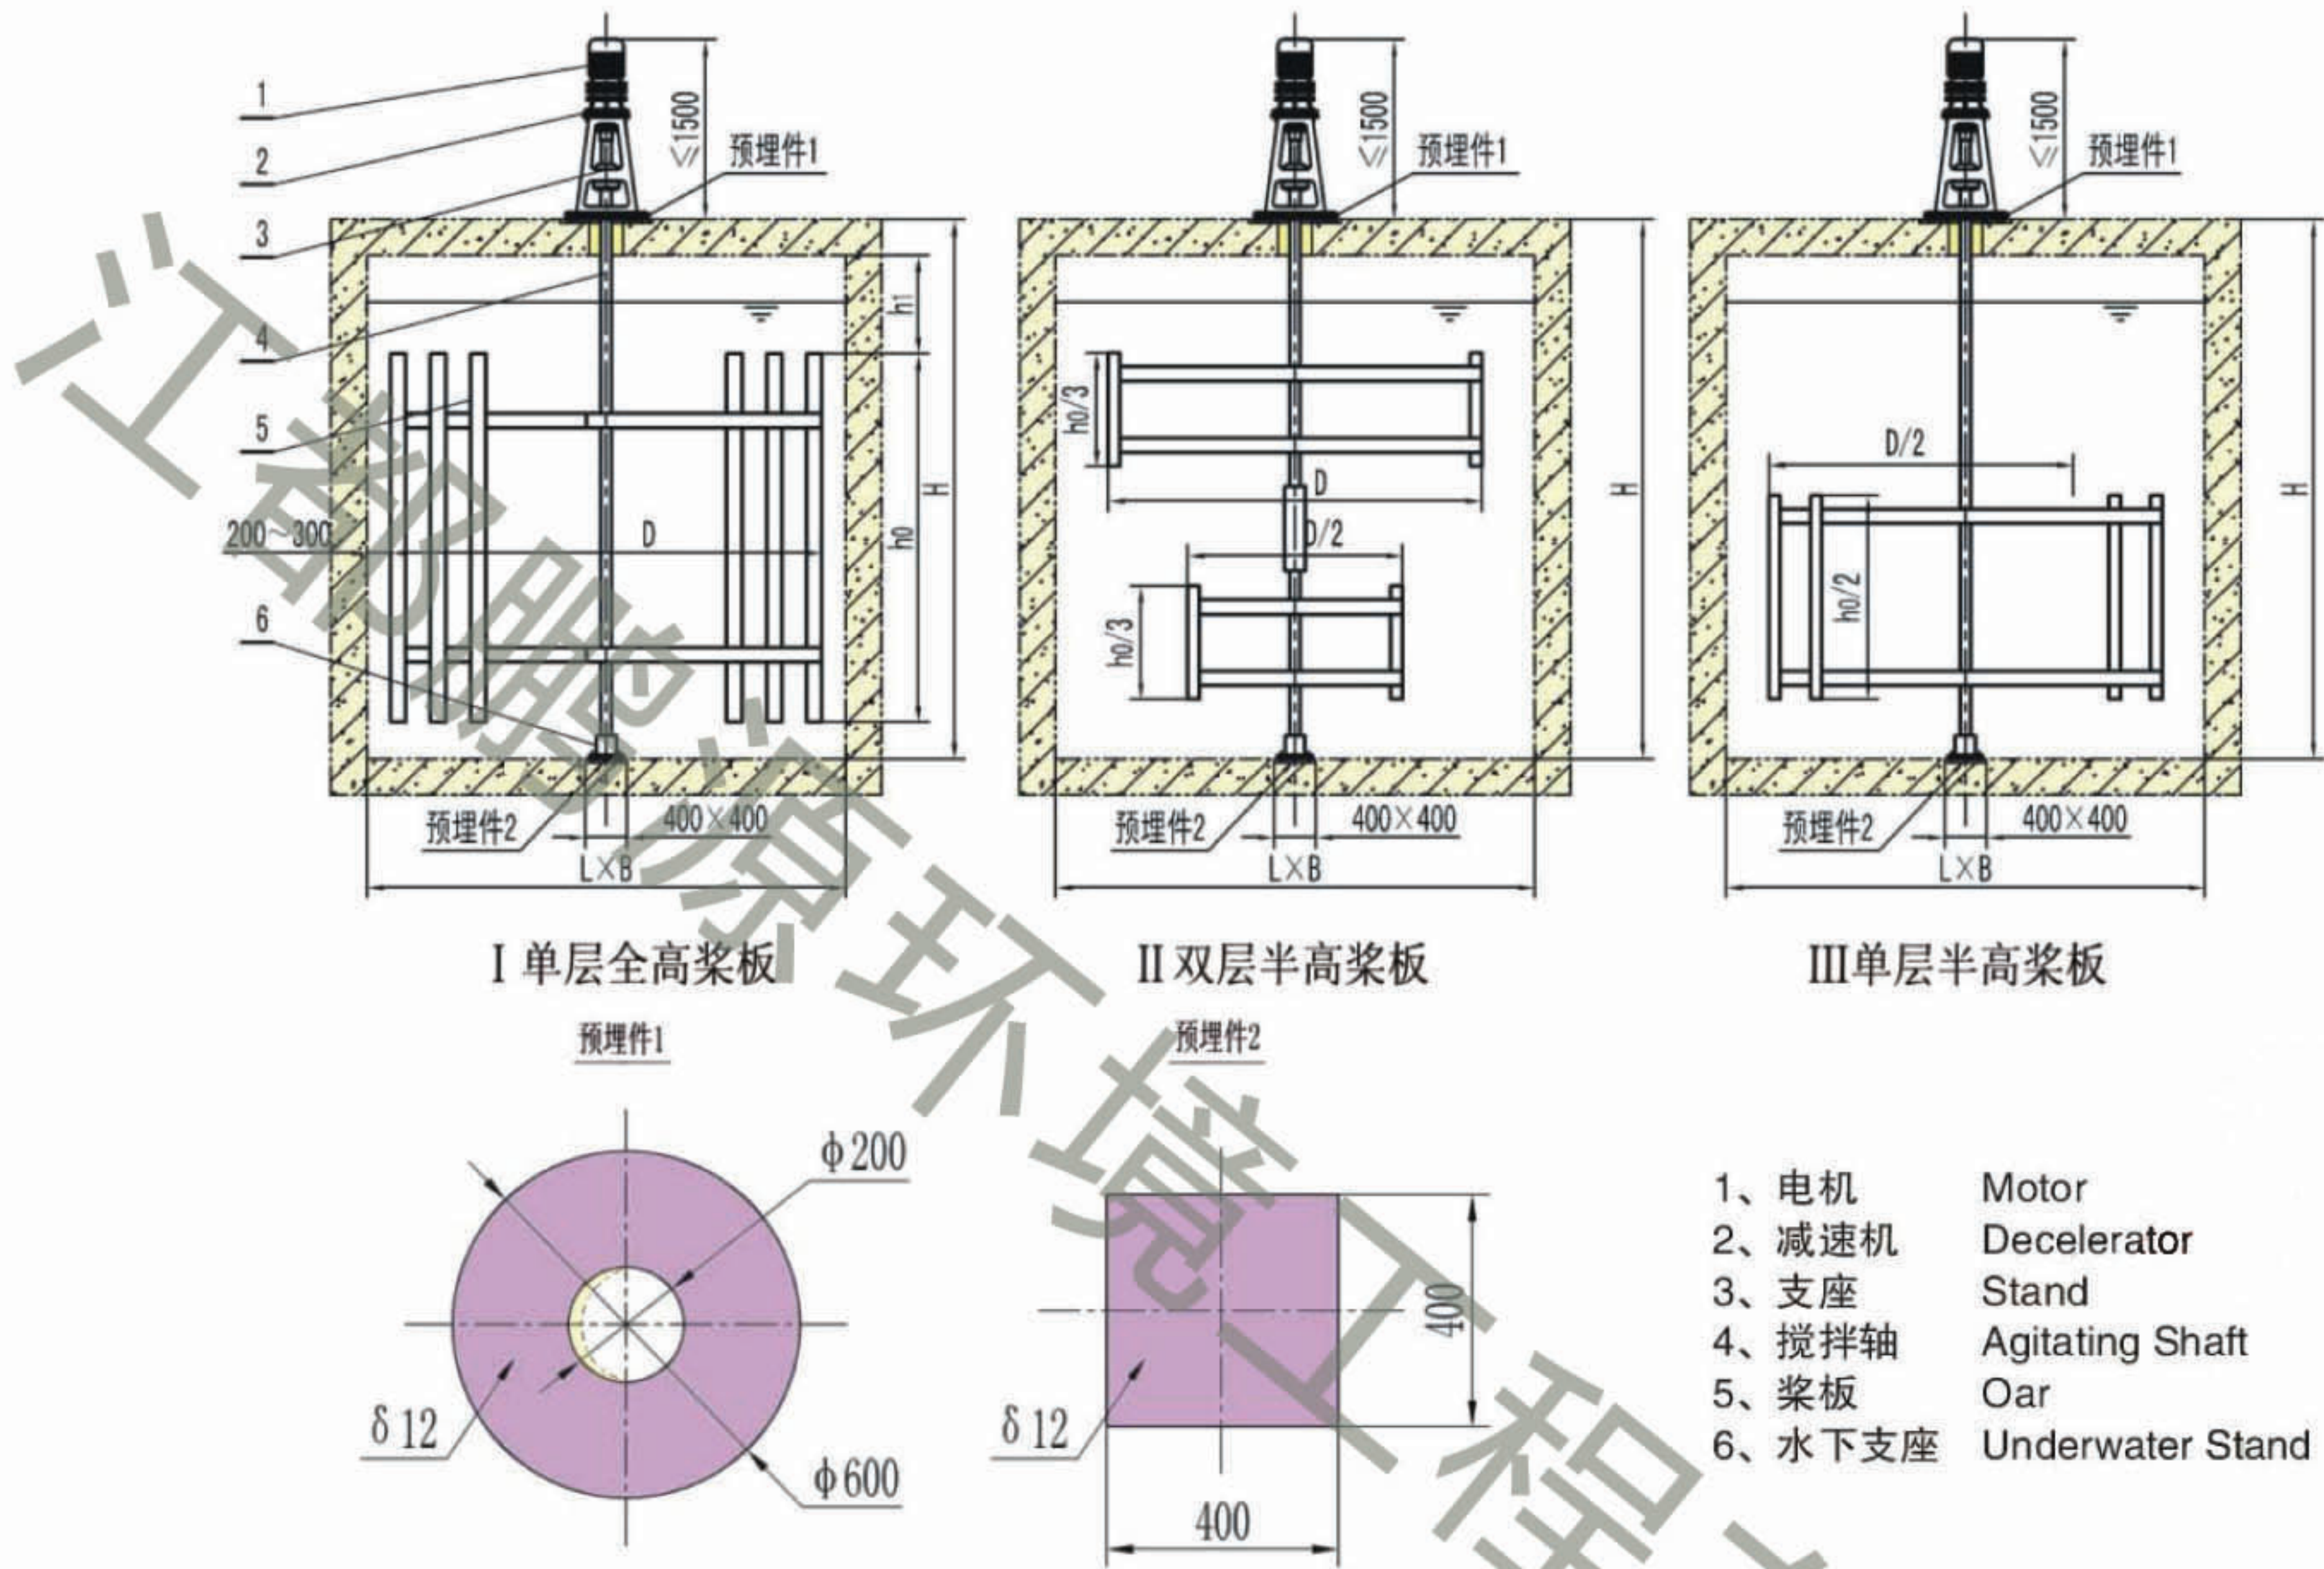

- 1、电机 Motor
- 2、减速机 Decelerator
- 3、支座 Stand
- 4、搅拌轴 Agitating Shaft
- 5、桨板 Oar
- 6、水下支座 Underwater Stand

## 技术性能参数及外形尺寸表 Technical Parameters Shape and Size

参数	池子尺寸 (m)		搅拌器尺寸 (mm)			搅拌器功率 (kW)			搅拌器转速 (r/min)		
	长×宽 (L×B)	H	D	h <sub>0</sub>	h <sub>1</sub>	I	II	III	I	II	III
LFJ-1700	2.2 × 2.2	3.4	1700	2600	400	0.75	0.37	0.37	8	5.2	3.9
LFJ-2800	3.25 × 3.25	4.0	2875	3500	350	0.75	0.37	0.37	5.2	3.9	3.2
LFJ-3000	3.5 × 3.5	3.55	3000	2200	550	0.37	0.25	0.18	3.9	2.5	1.8
LFJ-3500	4.3 × 4.3	4	3580	1200	550	1.1	0.75	0.55	3.9	2.5	1.5
	4.7 × 4.7	3.4	3580	1400	550	1.1	0.75	0.55	3.9	3.2	2.5

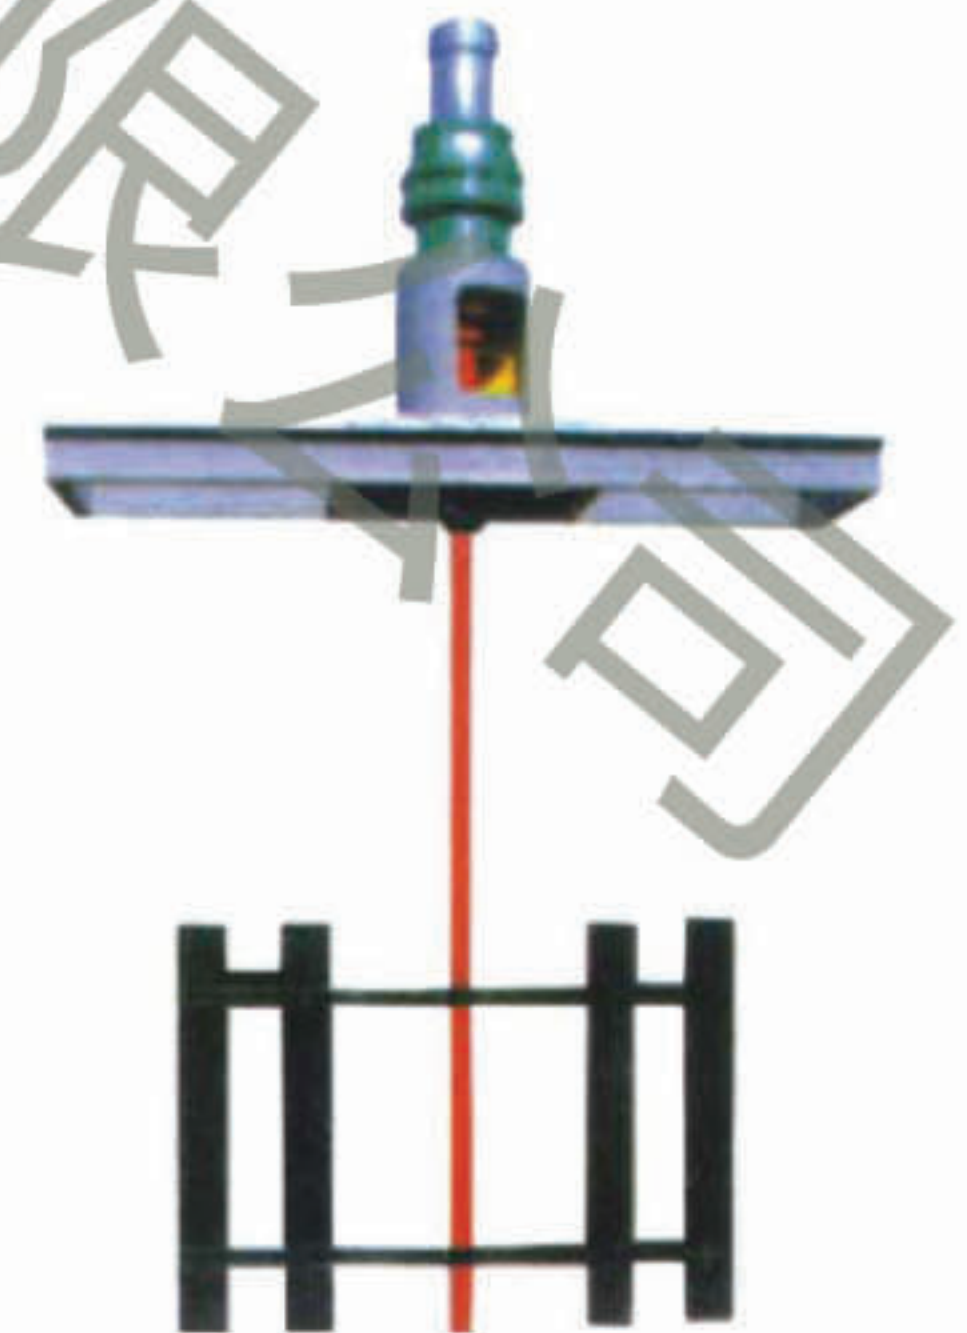

## 订货说明 Requirements for Order

1. 对搅拌机的层次或转速档有特殊要求时应注明。
2. 当用于老池改造时本公司可根据您的要求制作。
3. 水源水质经常变化时，可订购调速型。
4. 立式搅拌机若需配工作桥请注明。
5. 请注明主体设备的材质。

1. Note when there is special demand for the level of agitator or speed switch.
2. The machine can be produced according to your demand when it is used in reformed old base tank.
3. Speed regulation machine must be ordered when water quality is ever-changing.
4. The vertical agitator doesn't consist of working bridge. When the bridge is needed, note that.
5. Please specify the material for main body of the agitator.