




HJG 型桁架式刮泥机 TYPE-HJG TRUSSED MUD-SCRAPER

http://www.jdpyhj.com

HJG型不带撇渣外形结构 (Lk=10.3~20.3m)

Outlines and Configurations of Type HJG without Scumming Devices (tank width:Lk=10.3~20.3m)

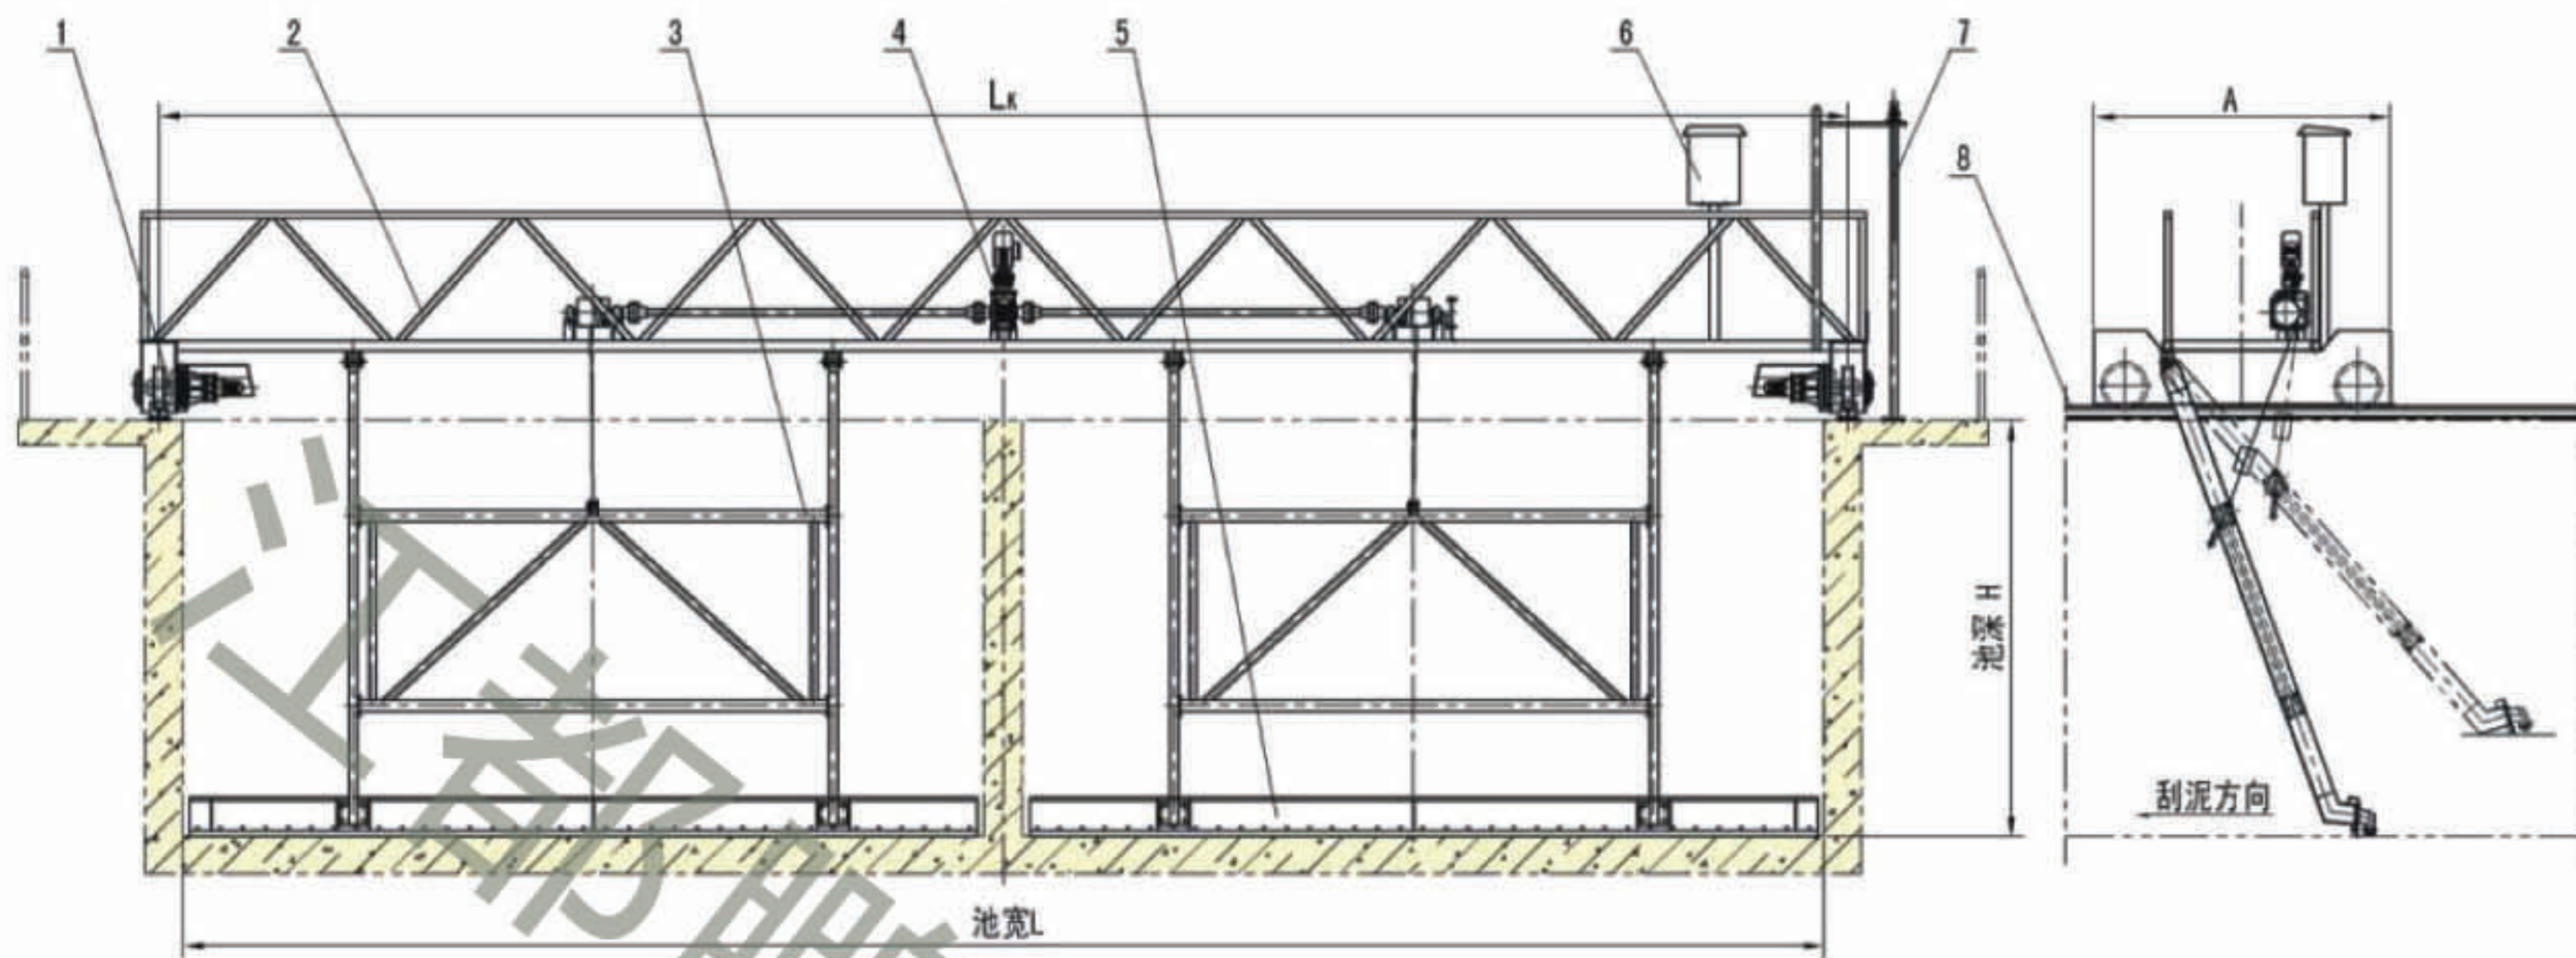

- 1、端梁与传动机构
- 2、主梁
- 3、耙臂
- 4、卷扬机构
- 5、刮板
- 6、电控系统
- 7、输配电装置
- 8、轨道

技术性能参数 Technical Parameters

型号	参数	行走功率 (kW)	卷扬功率 (kW)	行走速度 (m/min)	卷扬速度 (m/min)	推荐池深 (m)	配套轻轨 (kg/m)	提耙高度 (mm)	A (mm)
HJG-4.3		0.37	0.4	1.0	0.85	3.5 ~ 5	15	200 ~ 800	2000~2400
HJG-5.3		0.37	0.4						
HJG-6.3		0.75	0.4						
HJG-7.3		0.75	0.4						
HJG-8.3		0.75	0.8						
HJG-10.3		0.55 × 2	0.8						
HJG-12.3		0.55 × 2	0.8						
HJG-15.3		0.75 × 2	0.8						
HJG-20.3		0.75 × 2	0.8				22		

订货说明 Requirements for Order

1. 对照技术性能结合工艺要求, 注明型号规格及标高、池长等参数。
2. 电控箱、轨道、输配电装置 (详见HJX桁架式吸泥机P95)、预埋件等应另外订货。
3. 特殊材质 (例水下不锈钢、工作桥为不锈钢或铝合金等) 及防腐、减速机品牌等应注明, 不注明表示均按碳钢普通防腐及国产摆线减速机订货。
4. 结冰 (厚 < 3mm) 的寒冷地区可另订破冰装置。
5. 多格水池注明隔墙厚, 不注明表示按200订货。
6. 分成多格池子的桁架刮泥机若需独立卷扬提耙请注明, 不注明表示按一台电机多组卷扬订货。
7. 需要浮渣刮集机构或有其它要求, 请注明。



1. Note type, specifications, height mark, length of tank and etc according to the technical parameters and process requirements.
2. Electric cabinet, rail, transmission and distribution device (referring to HJX type trussed sucker for more detail P95), embedded parts should be ordered separately.
3. Special material (underwater stainless steel, stainless steel working bridge or A-alloy and etc.) and anticorrosion requirements or brand of reducer should be specified. Ordinary anticorrosion carbon steel and domestic cycloid reducer will be supplied without note.
4. Ice broker should be ordered separately in cold area if the thickness of ice is less than 3mm.
5. Thickness of wall should be specified in multiple lattices tank, thickness of 200 would be supplied without note.
6. If independent winding motor are needed in rake rising in trussed scraper with multiple lattices tank, note should be made, one electric motor with many groups of winding mechanism will supplied without note.
7. If you need drosses scratch or other needs, please specify.